

DS-KH6320-TE1


Video Intercom Indoor Station with 7-Inch Touch Screen



Key Feature

- New UI V2.0: User friendly design
- 7-inch colorful touch screen with resolution 1024 × 600
- Standard PoE
- Stores messages and capture pictures in the TF card
- Remote unlocking via the client software or the mobile client
- Views live videos of door stations and linked cameras

Typical Application

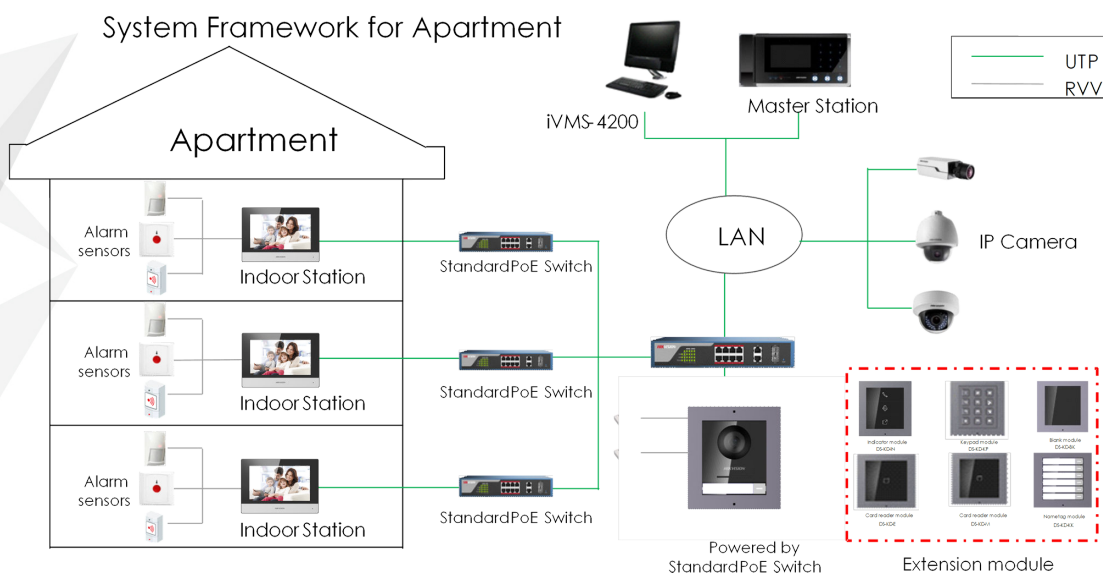

Specification

| Model | | DS-KH6320-TE1 |
|---------|----------------------------|--|
| System | Memory | 128 MB |
| | Flash | 32 MB |
| | Operation system | Embedded Linux operation system |
| Display | Display screen | 7-inch colorful TFT LCD |
| | Display resolution | 1024 × 600 |
| | Operation method | Capacitive touch screen |
| Audio | Audio input | Built-in omnidirectional microphone |
| | Audio output | Built-in loudspeaker |
| | Audio compression standard | G.711 U |
| | Audio compression rate | 64 Kbps |
| | Audio quality | Noise suppression and echo cancellation |
| Network | Wired network | 10/100 Mbps self-adaptive network |
| | Network protocol | TCP/IP、SIP、RTSP |
| | Network interface | 1 RJ-45 10/100 Mbps self-adaptive |
| | Alarm input | 8-ch alarm inputs |
| | TF card | Max to 32 G, SD 2.0 or lower version |
| General | Power supply | IEEE802.3af, standard PoE |
| | | 12 VDC/1 A |
| | Power consumption | ≤ 6 W |
| | Working temperature | -10 °C to 55 °C (14 °F to 131 °F) |
| | Working humidity | 10% to 90% |
| | Dimensions (W × H × D) | 200 mm × 140 mm × 15.1 mm (7.9" × 5.5" × 0.6") |

Available Model

DS-KH6320-TE1



CENTRAL SECURITY DISTRIBUTION

An Anixter Company

1300 319 499

csd.com.au

VIC: Mulgrave, Tullamarine NSW: Seven Hills, Waterloo ACT: Fyshwick QLD: Loganholme SA: Marleston WA: Balcatta